



Rear Car Clips Set Up Guide

100605



Set Up Video:

www.rightlinegear.com/setup.html

The correct attachment of this product is critical and beyond the control of Rightline Gear. The safe use and long life of this product depends entirely on your good judgment and following these directions.

Add the Rear Car Clips (Fig 1) to the side straps of the Rightline Gear Car Back Carrier to attach the carrier to vehicles WITHOUT a roof rack (Fig 2).



1- Place the Car Back Carrier top side up. Extend one of the long side straps out. Make sure the strap is not twisted (Fig 3 and Fig 4).



Fig 3



Fig 4

2-Remove the male buckle from the strap. Make sure the other parts are positioned as shown (Fig 5).



Fig 5

3-Add the Rear Car Clip and the male buckle onto the strap (Fig 6). Make sure the strap goes through the correct side of the buckle (Fig 6 Close-Up)



Fig 6

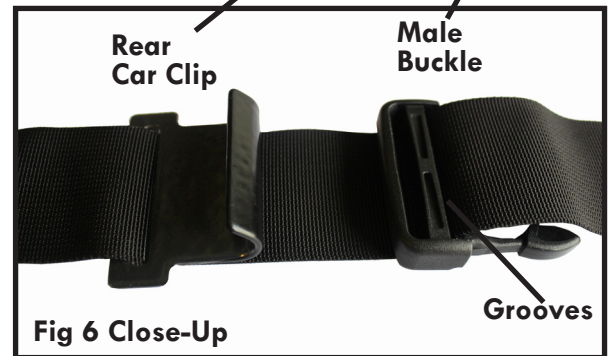


Fig 6 Close-Up

4-Run the strap back through the buckle, the Rear Car Clip, the pad, and the tri-glide. (Fig 7).



Fig 7

5-Repeat steps 1-4 for the second long side strap.

6-Place the Rear Car Clips in the gap between the vehicle's rear hatch door and roof (Fig 8).



Fig 8

7-Make sure the protective pads are face down on the top rear corner of the vehicle (Fig 9).

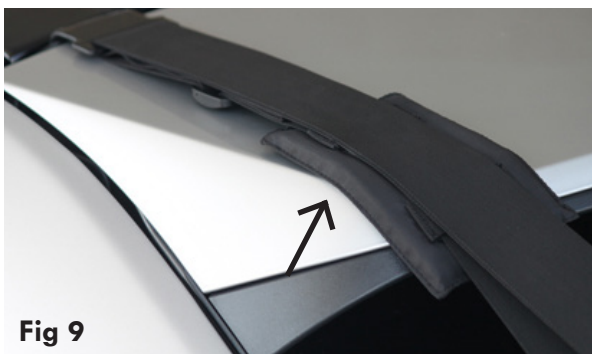


Fig 9

8-Buckle the long side straps into the short side straps (Fig 10), testing that the buckle is fully engaged.



Fig 10

Please see the **Car Back Carrier Set Up Guide** for additional instructions.

1 Year Manufacturer's Limited Warranty
www.rightlinegear.com/product-warranty.html