



Truck Tailgating Canopy

110780

Set Up
Video:



<https://rightlinegear.com/support-faqs/product-videos/>

The correct attachment of this product is critical and beyond the control of Rightline Gear. The safe use and long life of this product depends entirely on your good judgment and following these directions.

Set Up The Steel Poles

1-Fill the first sand bag to approximately 5" from the top with sand (Fig 1).



Fig 1

Sand Fill Line

2-Secure the bag's hook-&-loop closures.

3-Locate the side of a steel pole segment that has a hole at the same height as the sand bag (Fig 2).



Fig 2

Fig 3

4-Connect the sand bag's center hook-&-loop closures around the pole segment (Fig 3).

5-Connect the sand bag's metal hook to the hole in the pole segment and stand the sand bag and pole segment upright (Fig 4).



Fig 4

6-Roll the top of the sand bag down (2) times and connect the top and bottom hook-&-loop closures around the pole segment (Fig 5, Fig 6, and Fig 7).



Fig 5

Fig 6

Fig 7

7-Connect the remaining segments of the steel pole. Repeat for the second steel pole and sand bag (Fig 8).



Fig 8

NOTE: WHEN POSITIONING THE STEEL POLES AND SAND BAGS, PICK UP THE POLES AND SAND BAGS TOGETHER. DO NOT TRY TO PICK UP ONLY THE STEEL POLES OR ONLY THE SAND BAGS AS DAMAGE MAY OCCUR.

Set Up The Canopy

1-Lay the canopy over a flat area, logo side facing downwards.

2-Identify the gray pole and (2) orange poles (Fig 9).



Fig 9

3-Thread the gray pole through the gray pole sleeve (Fig 10) and insert its end into the gray pole pocket (Fig 11).



Fig 12

Fig 11

Fig 10

4-Thread the (2) orange poles through the orange pole sleeves (Fig 10) and insert their ends into the orange pole pockets near the canopy's bed flap (Fig 12).

5-Place the opposite end of the gray pole into the other gray pole pocket.

6-Place the opposite ends of the orange poles into the other orange pole pockets (Fig 13).



Fig 13

7-Identify the bed flap cross bar pole and (2) tailgate poles (Fig 9).

8-Thread the bed flap cross bar pole through the bed flap cross bar pole sleeve (Fig 14). Insert the metal ferrules into the 90 degree connectors (Fig 15, Fig 16).



9-Flip the canopy over and place its bed flap over the truck's open tailgate and bed (Fig 17).



10-Insert the metal ferrule of the tailgate pole into the 90 degree connector (Fig 18).

11-Place the plastic tip into the corner pocket of the tailgate (Fig 19).



12-Repeat steps 10-11 for the second tailgate pole (Fig 20).

13-Loosely attach the bed flap straps to the bottom outside lip of the truck bed (Fig 21, Fig 22).




14-Run the tailgate straps around the tailgate and loosely attach to the lip of the bumper (Fig 23, Fig 24).

15-Place the steel poles and sand bags just in front of the canopy's orange triangle corners (Fig 25).



16-Lift the canopy and place the end of the steel poles into the gray steel pole pockets (Fig 26).

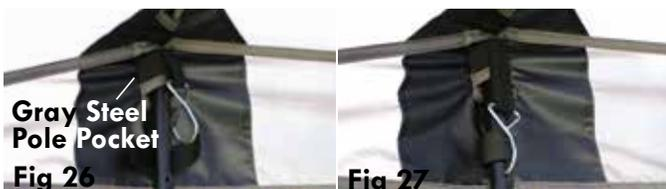

17-Connect the hook-&-loop closures around the steel poles and connect the metal hooks into the holes in the poles (Fig 27).

18-Tighten the bed flap straps and tailgate straps evenly so the tailgate poles are standing straight up.

19-Adjust the steel poles so they are standing straight up and tie off the strap's loose ends (Fig 28).



WARNING: KEEP ALL FLAME AND HEAT SOURCES AWAY FROM THIS CANOPY FABRIC

This canopy is made of flame-resistant fabric. It is not fireproof. The fabric will burn if left in continuous contact with a flame source. The following precautions should be taken when using:

- Do not use candles, matches or open flames of any kind in or near the canopy.
- Do not cook directly underneath the canopy.
- Build campfires downwind and several meters away from the canopy and be sure to fully extinguish campfires before leaving a campsite or before retiring for the night.
- Exercise extreme caution when using fuel-powered lanterns or heaters underneath the canopy and use battery-operated lanterns whenever possible.
- Do not refuel lamps, heaters or stoves underneath the canopy.
- Extinguish or turn off all lanterns before going to sleep.
- Do not smoke underneath the canopy.
- Do not store flammable liquids underneath the canopy.

- This canopy meets the flammability requirements of CPAI-84. The application of any foreign substance to the fabric may render the flame-resistant properties ineffective.
- In order to prolong its useful life, clean and dry the canopy before storing.
- Clean the canopy by hand using warm water and mild soap if necessary.
- Do not drive while the canopy is set up in the back of the truck.